


**SECTION A-A**

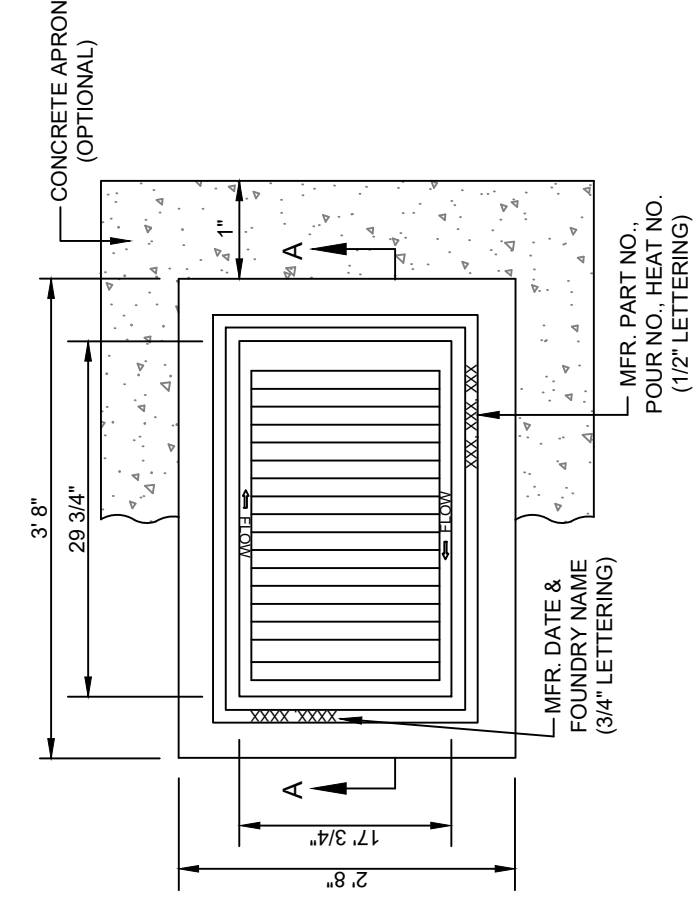

**PLAN**

**NOTES**

1. ALL CONSTRUCTION AND MATERIAL REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE CURRENT ODOT STANDARD SPECIFICATIONS.
2. FRAME TYPE GRATES SHALL NOT BE USED IN TRENCH INSTALLATIONS.
3. GRATES SHALL BE INSTALLED IN THE FRAME WITH FLOW ARROW POINTING DOWNSTREAM OR TOWARD THE LOW POINT IN A SUMP.
4. ALL LETTERING IS TO BE RECESSED 1/16". ALL INFORMATION REQUIRED SHALL BE SUFFICIENT FOR IDENTIFICATION, AS SHOWN.
5. GRATES SHALL BE CAST STEEL, DUCTILE IRON, OR GRAY IRON, CONFORMING TO SECTION 725 OF THE CURRENT ODOT SPECIFICATIONS.
6. INLET FRAMES, GRATES, AND COVER GRATES, INSTALLED DURING ORIGINAL CONSTRUCTION, SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE OF THE ORIGINAL INLET OR MANHOLE.

REVISION	BY	DATE

<b>AREA INLET</b>	
STANDARD DETAILS	
CITY OF JENKS, OKLAHOMA	
ENGINEERING DEPARTMENT	
DATE: 4-11-22	STANDARD NO. STRM-06