


ASPHALTIC CONCRETE

PORTLAND CEMENT CONCRETE

- NOTES:
1. SIDEWALKS TO BE LOCATED PER STREET CROSS-SECTION DETAILS.
 2. ADA RAMP PER STANDARD STRT-07.
 3. INTERSECTION WITH MAJOR STREETS OR HIGHWAYS SHALL HAVE A MINIMUM 40' FACE OF CURB RADIUS.

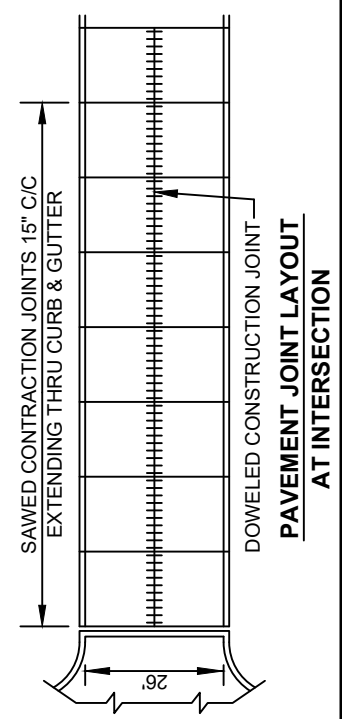

REVISION	BY	DATE

STREET INTERSECTION LAYOUT

STANDARD DETAILS

CITY OF JENKS, OKLAHOMA

ENGINEERING DEPARTMENT

DATE: 4-11-22 STANDARD NO. STRT-11