


SAW CUT ENTIRE
ROADWAY WIDTH OF
EXISTING PAVEMENT
1/3 PAVEMENT
THICKNESS

8" MIN. HIGH EARLY
STRENGTH CONCRETE

SAW CUT PERIMETER OF
PATCH AND SEAL WITH
RUBBERIZED ASPHALT

EXISTING
PAVEMENT

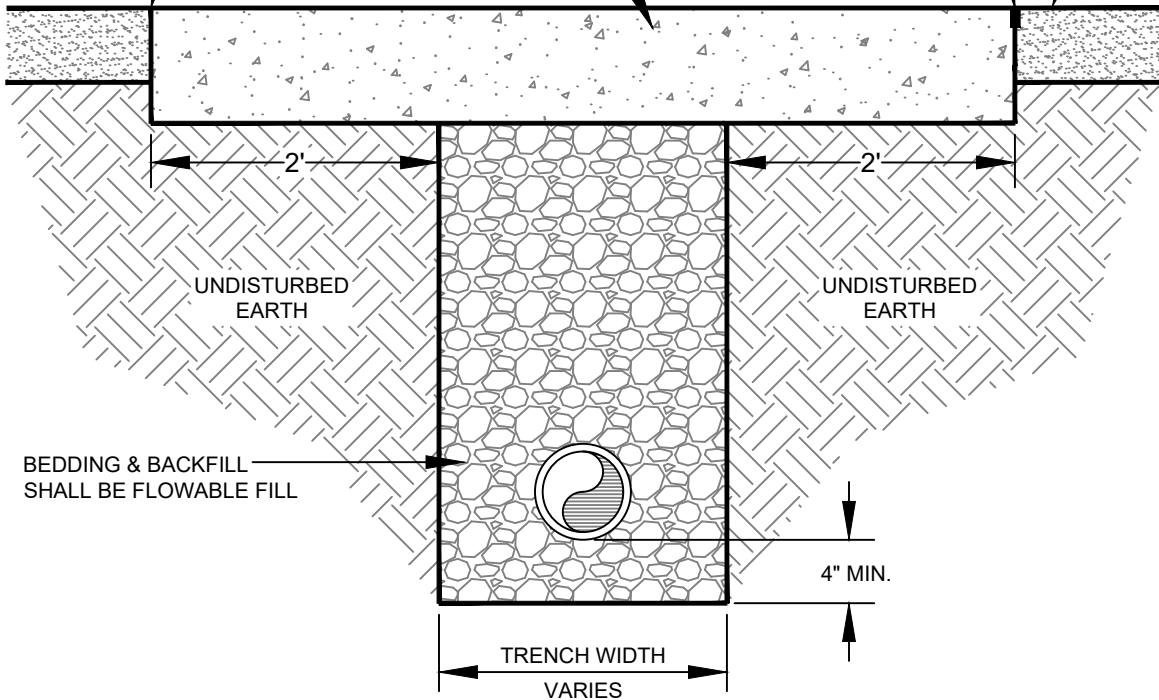

USE THIS DETAIL WHERE IT IS NECESSARY TO CUT THE EXISTING PAVEMENT (ASPHALT OR CONCRETE) FOR REMOVAL, AND REPLACEMENT OR CONSTRUCTION OF AN UNDERGROUND UTILITY.

NOTES:

1. CONCRETE TO BE PLACED ON HALF OF ROADWAY AT A TIME USING HIGH EARLY STRENGTH CONCRETE.
2. NEW SURFACE SHALL TRANSITION SMOOTHLY INTO EXISTING PAVEMENT.

REVISION	BY	DATE	STREET REPLACEMENT FOR UTILITY OR REPAIR STANDARD DETAILS	
			ENGINEERING DEPARTMENT	
			DATE: 4-11-22	STANDARD NO. STRT-14